

LED RHYTHM

LED
PRECISE, HIGH-OUTPUT LIGHTING

Hermes

LED FLOOD LIGHTING

- Symbol of luxury
Hermes - the "Hermes" in lamps, elegance and luxury go hand in hand, exquisite light adds noble temperament to your space, showing taste and style.
- High-end choice
Hermes lighting is not only a functional product, but also a work of art, creating excellent light effects to meet every need of a high-end lifestyle.

80W, 100W, 120W, 150W, 200W, 240W



- Soft light upgrade
Compared with Ocean II, the luminous area is increased by **20%**, which is softer and brighter, perfectly solving the brightness requirements and reducing glare.
- Industry first
Backlight uniformity (cd/m²) is introduced into lamps for the first time.
Hermes uniformity is **≥80%**, far exceeding the 60% of ordinary lamps.
- Precise control
90° adjustable beam angle, flexible control of light direction, perfectly solving the problem of uneven light.
- Perfect lighting
The unique structural design ensures no shadows and evenly distributed brightness, providing you with a seamless and perfect lighting experience
- Optical pioneer
Precision prism board technology accurately controls light, and each beam of light is carefully crafted to present a perfect lighting experience.



Soft light upgrade

Compared with Ocean II, the luminous area is increased by **20%**, which is softer and brighter, perfectly solving the brightness requirements and reducing glare

Industry first

Backlight uniformity (cd/m²) is introduced into lamps for the first time.
Hermes uniformity is **≥80%**, far exceeding the 60% of ordinary lamps

Precise control


90° adjustable beam angle, flexible control of light direction, perfectly solving the problem of uneven light.

ORDERING INFORMATION


SERIES	WATTS	CCT	OPTICS	INPUT PWR	Protection	Housing Material	DIMMING	FIELDS APPLICATION
Hermes	80W 100W 120W 150W 200W 240W	3000K 4000K 5000K 5700K	90° 120°	220-240/ 120-277 VAC	IP20	Die Cast Aluminum	0-10V Dimmable	Sports Lighting

- 80 CRI CRI Standard
- Custom RAL Colors Require Additional Costs & Lead Times
- CM Mounting Standard

Distribution Types



90°



120°

LUMEN CHART

	3000K	4000K	5000K	5700K
80W	10400lm	11200lm	12000lm	11200lm
100W	13000lm	14000lm	15000lm	14000lm
120W	15600lm	16800lm	18000lm	16800lm
150W	19500lm	21000lm	22500lm	21000lm
200W	26000lm	28000lm	30000lm	28000lm
240W	31200lm	33600lm	36000lm	33600lm

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

EMAIL: service@ledrhythm.com | WEBSITE: WWW.LEDRHYTHM.COM

Hermes

LED FLOOD LIGHTING

SPECIFICATIONS

Expected Life | Over 50,000 hrs.

Color Rendering Index (CRI) | >80

Operating Temp | -30°C ~ +45°C

Relative Humidity | 0-90% RH

Power Factor | ≥95%

Input Volt | 220-240 VAC/120-277 VAC

Frequency | 50/60 Hz

LED Chips | OSRAM

DIMMING | 0-10V Optional

LED Efficiency

- 3000K, 130 lm/w

- 4000K, 140 lm/w

- 5000K, 150 lm/w

- 5700K, 130 lm/w

WARRANTIES

SEE WEBSITE FOR DETAILS

5-Year

MATERIALS

Housing | High-strength sheet metal


Finish | Protective UV Stabilized

Powdercoat 4000 Hour Salt


Spray Tested to ASTM B117

Lens | PC

PRODUCT SIZE

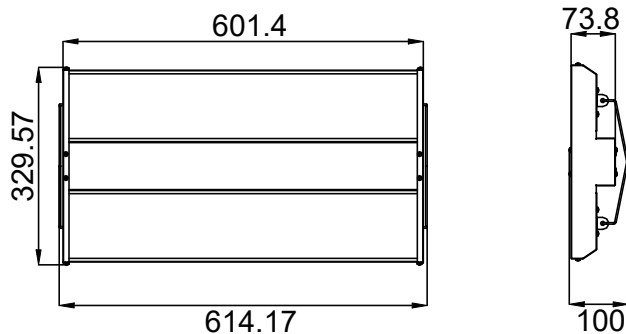

80-120W

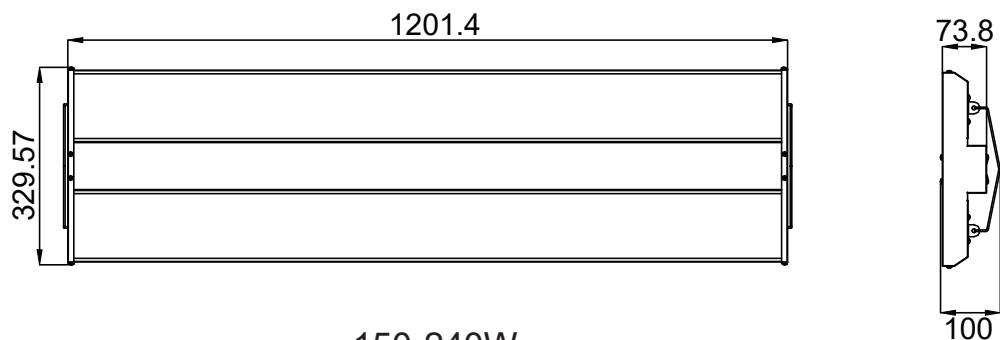

150-240W

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

EMAIL: service@ledrhythm.com | WEBSITE: WWW.LEDRHYTHM.COM